


Model: TT

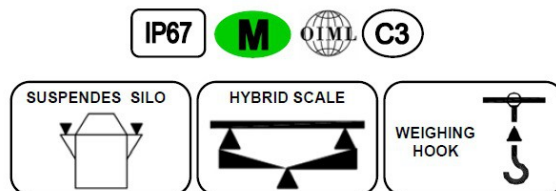

APPLICATION:
 Electronic hooks,
 Suspended deposits,
 Hybridizations

CAPACITY RANGE:
 2, 5, 10t

MATERIAL:
 Special Steel

ENVIRONMENTAL PROTECTION:
 IP67



APPROVALS:
 CE 3000 Div – E-12.02.C08
 According to OIML - R60

CHARACTERISTICS
 Construction using special steel. High quality protection barrier
 using special silicones.
 Mounting compatibility

APPLICATIONS
 The TT model is manufactured to maintain its performance
 capabilities in the environmental conditions existing in industries,
 where tasks and cleaning demand a good environmental
 protection.

OPTIONS
 Sensitivity alignment: $\pm 0,1\%$.
 Consult for special requirements.

TEFLÓN® protects all
 the internal cables

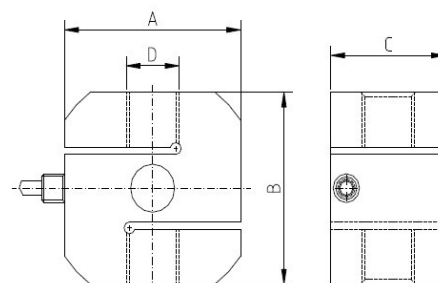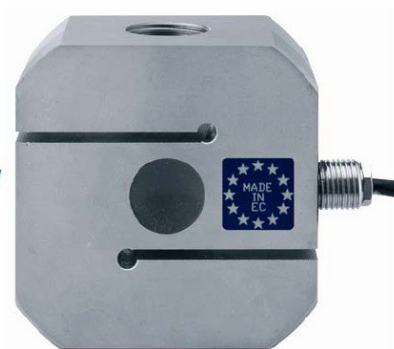

Capacity	A	B	C	D
2	80	80	42	2xM16
5	80	80	42	2xM24
10	80	80	52	2xM24

Dimensions in mm

