



Model: CFLI

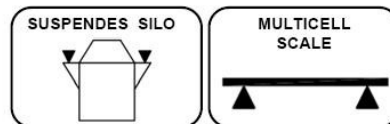

TEFLÓN® protects all the internal cables

OPTIONS

Length of the cable is optional.
 Hostile environmental cable.

ATEX option

EC-Type examination certificate
 CEC 11 ATEX 040 X according directive
 94/9/EC

Ex II 1G EExia IIC

T6 (Ta-20÷+40°C)

TX (Ta-20÷+65°C)



II 1D tD A20

Tx°C (Ta-20÷+40°C)

TX°C (Ta-20÷+65°C)

For more information look up the
 EC- type examination certificate,
 and documentation.

Consult for special requirements.

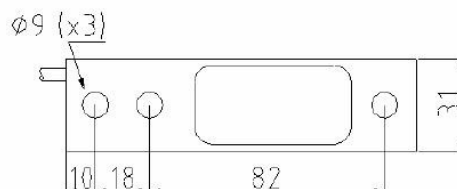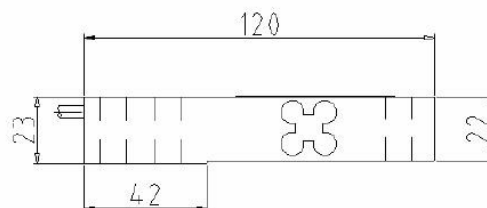

Dimensions in mm

CHARACTERISTICS

Construction using stainless steel. The laser soldered
 closing protects from the typical environment in food and
 chemical industry.

Mounting compatibility.

APPLICATION:

Weighbridges and silos

CAPACITY RANGE:

10t - 15, 120t - 20t - 25t - 30t

MATERIAL:

Stainless Steel

ENVIRONMENTAL PROTECTION:

IP68

APPROVALS:

